







Downlights | arrayLED 7.5 W 200 mA | CRI 80
60851W70

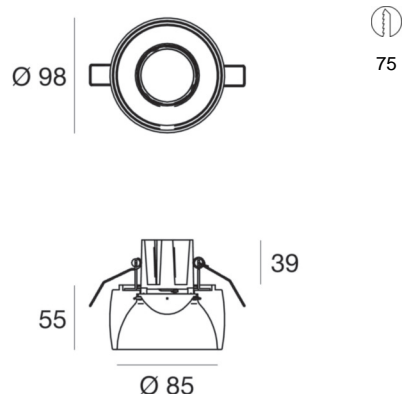

Technical data	
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Optics	Flood
Power	7.5 W
Luminous flux (source)	1117 lm
Current intensity	200mA
CCT / Tonalità	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP20
Optical compartment IP	IP40
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Operating temperature	-30°C / +85°C
Driver included	No
Induzione	No
Emergency mode	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Net weight	0.489 Kg

Finishing casing	
Material	plaster
Colour	white

Electronics	
	62431 1-10V Multi Power 99~264V AC / 170~280V DC
	62423 On/Off Driver 176~264V AC
	62432 DALI 1-10V Multi Power 176~240V AC / 220~240V DC

Downlights | arrayLED 7.5 W 200 mA | CRI 80
60851W70

Single emission downlights for indoor application. The warm white LED light source with a flood light distribution is composed of 1 arrayled LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 1117 lm, with a 148.9 lm/W nominal luminous efficacy.

The device body is made of plaster and features a white finish. The ingress protection degree is IP20; the total weight is of 0.489 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 7.5 W.

The device features protection class III and can be ceiling-mounted, with a 75 mm diameter hole (in plasterboard).

Illuminotechnical Features	
Luminous flux (source)	1117 lm
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Life / Failure ratio	L80C0B20 80H



Gypsum_SR | Downlights | Accessories
60851W70



Thick - KIT thicknesses for installation on plasterboard

Code
60830